


# Classic Performance. Authentic Stewart-Warner Style.

The latest in Stewart-Warner's new releases of vintage styles comes in a new multifunctional three-in-one gauge that combines the most useful gauges into a single instrument. Our Vintage and Nostalgic sets offer a nod to the iconic Stewart-Warner gauges of yesteryear with modern performance quality.

**The Vintage Kit.** The **Three-in-One Tachometer** comes with Integral Voltmeter and Fuel Level Gauges. The **Speedometer/Odometer** comes with Integral Oil Pressure and Water Temp Gauges. Features include a tan background, gold-plated bezel, and black pointers for a period-accurate appearance.

**The Nostalgic Kit.** The **Three-in-One Tachometer** comes with Integral Voltmeter and Fuel Level Gauges. The **Speedometer/Odometer** comes with Integral Oil Pressure and Water Temp Gauges. Features include a black and tan background, polished stainless steel bezel, and red pointers.

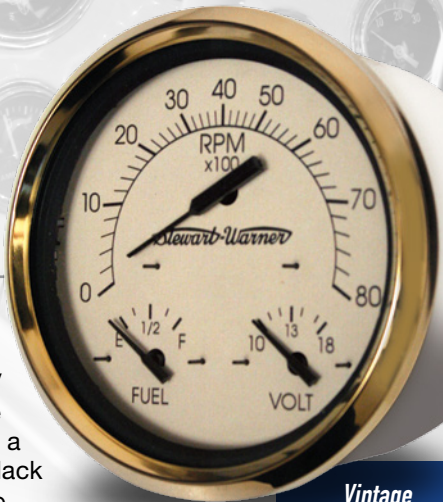

*Vintage*

*Nostalgic*



*Speedometer/Odometer with Integral Oil Pressure and Water Temp Gauges.*

*Tachometer with Integral Voltmeter and Fuel Level Gauges.*

- Each kit contains two gauge clusters.
- Each cluster features three gauges inside the 4-3/8" diameter housing.
- Kits include mounting hardware, harness, and senders for an all-in-one solution.
- The speedometer is easily calibrated with a measured mile push-button feature.

Item	Description	Part No.
Nostalgic Kit	Tan Background/Stainless Steel Bezel/Red Pointers	82258
Vintage Kit	Tan Background/Gold Bezel/Black Pointers	82259
Nostalgic Metric Kit	Tan Background/Stainless Steel Bezel/Red Pointers	82260
Vintage Metric Kit	Tan Background/Gold Bezel/Black Pointers	82261

## Connector Harness SPECIFICATIONS

<b>General</b>	
Mounting Hole	4.375" (112mm)
Depth Behind Faceplate	4.0" min.
Display	Analog 7-Character LCD
Lens	Polycarbonate
Bezel	Polished Stainless Steel or Gold-Plated
Bracket	Plastic
Clamping Range	0 - .8" (0 - 20mm)
Torque	5 to 7 inch pound (.57 - 80 Nm.)

**Backlighting**  
Colored diffused lighting for display.

<b>Water Integrity</b>	
Front will withstand direct water spray.	
Operating Temperature	-4°F to +158°F (-20°C to +70°C)
Storage Temperature	-22°F to +185°F (-30°C to +85°C)
Operating Voltage	11.5 - 16 vDC
Nominal Voltage	14.2 vDC
Current Consumption	<100 ma, Without Illumination
Connections	Connector Harness

**STEWART-WARNER**



*Genuine Parts*

For the authentic  
Stewart-Warner experience,  
call 1-800-676-1837  
or visit us online at  
[www.stewartwarner.com](http://www.stewartwarner.com).